



Wedge-type, hammer-drive metal anchor



AN-CU Wedge-type, hammer-drive metal anchor



Approvals:



Material for use:

SOLID



Concrete



Aerated
concrete



Stone


Product Material / Covering:

Zinc-plated

PROFESSIONAL BOX

	CODE	DIMENSIONS	EAN		
	ANCU06040	6 x 40 Ø6	8423533812728	100	1200
	ANCU06070	6 x 70 Ø6	8423533812735	100	1200

TECHNICAL INFORMATION

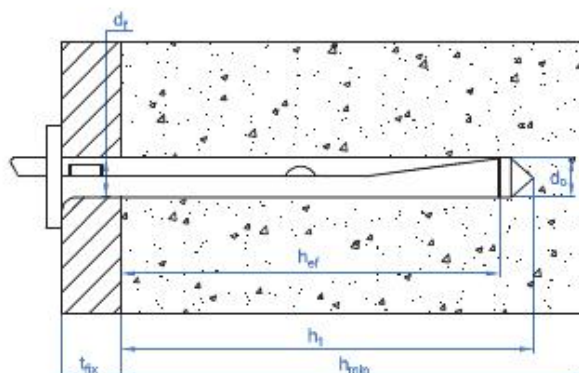


CODE	DIMENSIONS	Ø element to fix	Hole depth min.	Min. substrate thickness	Effective depth	Min. distance to edge	Min. distance from axis	Length	Metric	Tension load non-cracked concrete	Drill
------	------------	------------------	-----------------	--------------------------	-----------------	-----------------------	-------------------------	--------	--------	-----------------------------------	-------

ANCU06040	6 x 40 Ø6	7	40	80	32	150	200	40	6	120	6
ANCU06070	6 x 70 Ø6	7	40	80	32	150	200	70	6	120	6

CARACTERÍSTICAS



Zinc-plated



Medium loads

RECOMMENDED FOR



Handrails



Balcony handrail



Concrete building under construction



Waste container guard



APPROVAL SHEET

https://www.indexfix.com/docs/CE_ANCU_es.pdf



CERT_EOTA

https://www.indexfix.com/docs/ETA_ANCU_en.pdf



DOP

https://www.indexfix.com/docs/DoP_ANCU_en.pdf



DATA SHEET

https://www.indexfix.com/docs/FT_ANCU_en.pdf

*The data shown in this table are merely informative and do not constitute, in any case, contractual conditions of supply. The references contained in our catalog will be available until end of stock. Our prices do not include value added tax. This will be taxed according to current legislation for local and international transactions.