

Chemfix Products Limited
110 Mill Street East
WF12 9BQ Dewsbury
United Kingdom

Eurofins Product Testing A/S
Smedeskovvej 38
8464 Galten
Denmark

voc@eurofins.com
www.eurofins.com/voc-testing

Date
17 July 2013


Testing Report emission rate of VOC (volatile organic compounds)

1. 1. Information on the sample

Identification of the sample	Chemfix Epoxy Resin
Product type	Joint, adhesive
Batch Number	-
Date of production	-
Date of receipt	11/03/2013
Testing period (start-end)	14/03/2013 - 11/04/2013

2. Conclusion regarding the classification of the labeling of emission rate of VOC

This recommendation is based on the French regulations of 23rd March 2011 (prescription DEVL1101903D) and of 19th April 2011 (regulation DEVL1104875A). For further information kindly visit our homepage www.eurofins.com/france-voc.

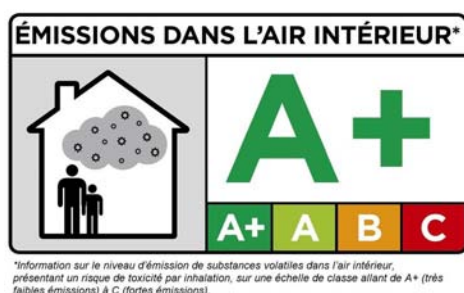

The classification of the emission rate of VOC of the product has been indicated without explicitly considering the uncertainty linked to the result. According to the regulation No. 2011-321 of 23rd March 2011, the indication of the classification of the emission rate of VOC is the sole responsibility of the person – natural person or juristic person – placing the product at the disposal of the French market.

3. Testing procedure

Procedure	Principle	Parameters	Quantification Limit	Incertitude	
ISO 16000 parts -3, -6, -9, -11 Internal procedures used: 9810, 9811, 9812, 2808, 8400	GC/MS HPLC/UV	VOC Aldehydes Volatiles	2 µg/m ³ 3 µg/m ³	22% (RSD) Um = 2 x RSD = 45 %	
Parameters of testing in the room of emission					
Volume of the room, L	119	Temperature, °C	23±1	Relative humidity, %	50±5
Rate of regeneration of the air, 1/h	0,5	Consumption factor, m ² /m ³	0,007		
Testing conditions: The sample remains in the emission room during the whole 28 days of the testing period.					
Preparation of the sample					
Thickness in mm:	3				

4. Results

	Concentration After 28 days $\mu\text{g}/\text{m}^3$	C	B	A	A+
VOC Rate	<2	>2000	<2000	<1500	<1000
Formaldehyde	<3	>120	<120	<60	<10
Acetaldehyde	<3	>400	<400	<300	<200
Toluol	<2	>600	<600	<450	<300
Tetrachloroethylene	<2	>500	<500	<350	<250
Methylbenzene	<2	>1500	<1500	<1000	<750
Xylene	<2	>400	<400	<300	<200
Styrene	<2	>500	<500	<350	<250
2-Butoxyethanole	<2	>2000	<2000	<1500	<1000
1,2,4- Trimethylbenzene	<2	>2000	<2000	<1500	<1000
1,4-Dichlorobenzene	<2	>120	<120	<90	<60

< Means below
> Means above



Dr. Arja Valtanen
Analytical Service Manager